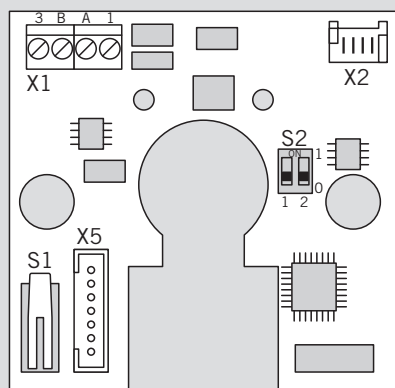


WN 055374 45532
01/12

Elektrostatisch gefährdete
Bauelemente

Static sensitive devices


Circuits sensibles à
l'électricité statique

Elementi costruttivi sensibili
all'elettricità statica

Elektrostatisch gevoelige
componenten

Beschaltung ST 3x DCW®

D

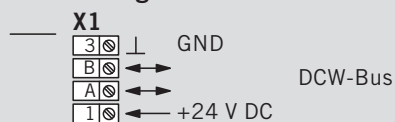

Beschreibung ST 3x DCW®

- X1** Verbindung zu externen DCW-Geräten.
X2 Verbindung zum internen Schlüsseltaster.
X5 Verbindung zur Firmware-Programmierung.
S1 Sabotage-Gehäuse-Kontakt.
S2 Mikro-Schalter zur Einstellung der Komponentenadressen:


Schalter	Adresse
1 2	
0 0	1
1 0	2
0 1	3
1 1	4

Technische Daten:

Versorgungsspannung: 24 V DC, +/- 10%
 stabilisiert
 Stromaufnahme: ca. 50 mA

Terminal connections ST 3x DCW®

GB

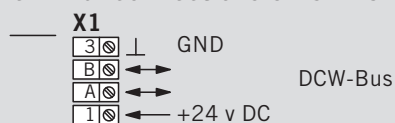

Description ST 3x DCW®

- X1** Connection to external DCW-Devices.
X2 Connection to internal key switch.
X5 Connection to firmware programming.
S1 Anti-tamper housing contact.
S2 Micro-Switch to Adjustment of komponent addresses:

Switch	Address
1 2	
0 0	1
1 0	2
0 1	3
1 1	4

Technical data:

Power supply: 24 v DC, +/- 10%
 stabilised
 Current input: approx. 50 mA

Änderungen vorbehalten
 Subject to change without notice